arXiv:1204.3100v1 [math.OC] 13 Apr 2012

Modular design of jointly optimal controllers and forwarding policies for wireless control*

Burak Demirel, Zhenhua Zou, Pablo Soldati, and Mikael Johansson

March 2, 2013

Abstract

We consider the joint design of forwarding policies and controllers for wireless control loops where sensor measurements are sent over an unreliable multi-hop wireless network to the controller node. For fixed sampling rate of the control loop, the co-design problem separates into two well-defined and independent subproblems: transmission scheduling for maximizing the delay-constrained reliability and optimal control under packet loss. We develop optimal solutions for these subproblems and show that the optimally co-designed system can be found by a one-dimensional search over the sampling interval. Several numerical examples illustrate the power of our approach.

Keywords. Linear optimal control; Communication networks; Optimality.

1 Introduction

Networked control has been an active area of research for more than a decade (*e.g.* [16] and the references therein) and the literature is by now rather extensive. The research has mainly focused on control design methods for a given system and high-level abstraction of the communication network in terms of its latency or loss. State-of-the-art control design techniques are very powerful when the control system is able to cope with the network deficiencies. When the resulting closed-loop performance is unsatisfactory, however, they typically do not provide any insight on how the communication system should be modified to yield better performance. For instance, it is not immediately clear if a shorter sampling interval is better if it also results in a higher packet loss rate in the network. On the communication side, current networking protocols tend to focus on maximizing the long-term average throughput or to minimize the energy cost of communication, and do not provide any direct ways to influence control-relevant network performances such as individual packet latency. In fact, little is known about which loss-latency

---

[*] The authors are with the Automatic Control Labotarory, School of Electrical Engineering, KTH Royal Institute of Technology, Stockholm SE-10044, SWEDEN (e-mail: firstname.secondname@ee.kth.se).

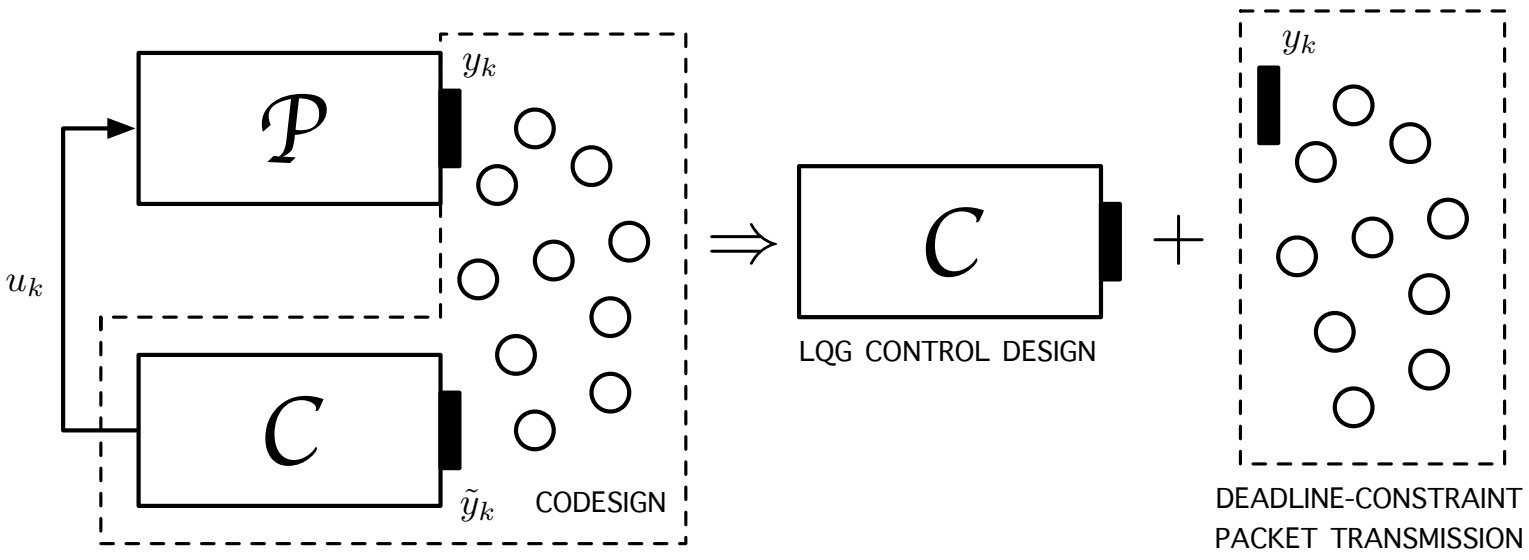

Figure 1: Our co-design framework separates the system design into two well-defined subproblems that admit optimal solutions: deadline-constrained maximum reliability routing which characterizes the achievable loss-latency pairs and the design of linear-quadratic Gaussian controllers under latency and loss to minimize the control performance loss.

combinations that can be achieved for a single packet transmitted over an unreliable multi-hop network, and only very recently, researchers have started to address real-time communication over unreliable networks.

In wired control systems, where sensor data and actuator commands are transferred over a high-speed bus, extensive latencies and losses are often due to interaction with other traffic. Hence, co-design issues do not appear until the system is very highly loaded and can often be dealt with simply by adding an additional communication bus. The situation for low-power wireless multi-hop communications is very different, as latencies and packet losses appear already in unloaded networks and the use of capacity expansion is non-trivial since the wireless medium is shared with other installations. Hence, co-design issues arise already for single-loop controllers.

This paper proposes a co-design framework for single-loop wireless control systems that is provably optimal. By parameterizing the system design in terms of the sample-time of the digital control loop, the co-design problem separates into two well-defined subproblems: to schedule the multi-hop network to maximize the deadline-constrained reliability, and to design a controller with optimum performance under (independent) packet losses. Drawing on our recent work on deadline-constrained scheduling [26, 31], we demonstrate how the network scheduling problem can be solved to optimality and how this characterizes the achievable loss-latency region for the multi-hop wireless network. Similarly, for a given communication latency and loss probability, we develop extensions to the work by Schenato *et al.* [23] that allows to compute optimal controllers and estimate the associated closed-loop performance, see Figure 1. Finally, we prove that adjusting the sampling rate and solving these subproblems allows to find the jointly optimal co-designed system. Numerical examples illustrate the power and flexibility of our framework.

2 Background and related work

A well-designed co-design framework requires insight and understanding of networking and control and how they interact. To gain analytical insight into how the network behavior influences the overall system performance, we first consider a simple scenario where the state of a stochastic linear system

$$dx(t) = ax(t)dt + dw(t)$$

should be estimated continuously at a remote location based on periodic noise-free samples $x(kh)$ of the state. The aim is to maintain a state estimate $\hat{x}(t)$ that minimizes the loss

$$J_e = \lim \sup_{T \to \infty} \frac{1}{T} \int_0^T \mathbf{E}\left\{(x(t) - \hat{x}(t))^2\right\} dt \ .$$

Samples are transmitted from the sensor to the estimator over an unreliable channel where packets experience a stochastic delay D. If the delay exceeds one sampling interval, the transmission is aborted and the packet is considered lost. This gives rise to a networked control system with both a time-varying delay and packet losses. As shown in [18], it is then possible to explicitly characterize the optimal loss

$$J_e = \mathbf{E}\left\{e^{2aD}\right\} \frac{(1-p)(e^{2ah}-1)}{4a^2h(1-pe^{2ah})} - \frac{1}{2a}$$

provided that $pe^{2ah} < 1$. This expression reveals that the achievable loss depends both on the sampling interval h, the loss probability p and the complete delay distribution (not only its mean). Specifically, J_e is monotone increasing in h and p, as well as in the mean delay and the delay variance.

However, in communication systems, latency and loss can typically not both be made small. The basic mechanism for dealing with lost packets is to use retransmissions, which then take additional time. Specifically, consider communication over a single link and assume that the medium is divided into time slots of length t_s. A single time slot allows to transmit one packet, and a transmission attempt fails with probability p_s. Assuming that $h = kt_s$ and that unacknowledged packets are retransmitted in the next time slot, the probability that the packet arrives with delay nt_s equals $(1-p_s)p_s^{n-1}$ and the probability that the packet is not transmitted until the end of the sampling interval is $p = p_s^k$. Note that to guarantee a small loss probability we must allow for more retransmission attempts and hence a longer sampling interval. Unfortunately, for this specific scenario there is no interesting co-design: J_e is bounded if $p_s^k e^{2akt_s} = \left(p_s e^{2at_s}\right)^k < 1$, so if we cannot stabilize the estimation error variance for $h = t_s$, then we cannot do so no matter how many retransmissions we allow for; moreover, since J_e is monotone increasing in k, so the optimal performance is obtained for $h = t_s$. As we will see in Section 6, however, the co-design decisions are much more involved when we consider closed-loop control over multi-hop wireless networks.

We can learn several things from this simple analysis: first, it is useful to consider a continuous-time performance criterion to be able to compare designs with various sampling intervals; second, the sampling interval, network latency and packet loss probability all impact the achievable closed-loop performance; and third, to solve the co-design problem we need to be able to characterize the set of achievable latencies and loss rates on a wireless network for a given packet generation rate.

2.1 Related work

Further insight into the co-design problem can be obtained by related work in digital control, real-time scheduling and networked control. We will briefly review some of the work most relevant to ours.

In many cases, faster sampling gives better control performance, but it also results in controllers that are more ill-conditioned and more sensitive to numerical errors that arise in fixed-point implementations (see, *e.g.* [5]). Faster sampling also consumes more computing resources. It is therefore often argued that one should choose the longest sampling period that gives acceptable performance. These arguments have led to a number of well-accepted rules-of-thumb for sample time selection, see *e.g.*, the textbooks [2, 5].

In a multi-tasking environment, more periodic tasks could run reliably on the same machine if these tasks are run less frequently. The precise number of tasks that can be run depends on what scheduling policy is used. The celebrated schedulability analysis by Liu and Layland [13] characterizes the maximum utilization for which all tasks can be guaranteed to meet their deadlines under rate monotonic and earliest-deadline first scheduling. The natural co-design framework is then to adjust the sampling times of controllers to optimize the overall system performance while maintaining schedulability guarantees, see *e.g.* [24, 7] for representative work.

Co-design for networked control systems is more complex, since sampling interval, latency distribution and reliability of end-to-end transmissions all influence the achievable closed-loop performance. Even when these parameters are fixed, the optimal control problems have been solved rather recently. Nilsson et al. [16] developed linear quadratic Gaussian optimal control for discrete-time linear systems with stochastic (networked-induced) delay. Sinopoli et al. [25] developed minimum variance optimal estimators for networked systems with packet losses and characterized its performance, while Schanato et al. [23] considered linear-quadratic control of linear systems under packet loss and established a separation principle under the assumption of reliable and instantaneous acknowledgements from actuator to controller. An extension to the case of random delays and packet losses was developed in [4]. Similarly, on the networking side it is well accepted that wireless communication needs reliable packet delivery [28, 27], but research on wireless communications with hard per-packet deadline constraint is difficult and has appeared only recently. Hou et al. [8] proposes a tractable model for deadline-constrained traffic where all packets arrive at the beginning of an interval and expire at the end of the interval. The main restriction of this work and its various extensions [10, 9] is that it only deals with a single-hop (star) network topology, while most practical deployments of low-power wireless rely on multi-hop communications.

In particular, recent communication standards for real-time wireless control, such as *Wireless*HART [6], ISA-100 [11] and IEEE 802.15.4e [1], are converging toward a design that combines a multi-hop and multi-path routing with a globally synchronized multi-channel Time Division Multiple Access (TDMA). Several recent works [21, 15] study the problem of providing reliable real-time communications over multi-hop network. The paper [21] formulates the scheduling problem of multiple deadline-constrained periodic data flows in *Wireless*HART network, and proves the problem is NP-hard. A heuristic scheduling algorithm is presented, but it assumes reliable links and thus cannot provide guaranteed or maximum deadline-constrained reliability. A practical scheduling mechanism is proposed in [15] based on routing packets on paths with the minimum number of consecutive packet losses.

Several attempts to develop co-design procedures for wireless control systems have appeared in the literature. Early attempts focus on resource-constrained scenarios where the amount of bits that can be communicated over a wireless channel during a sampling interval is limited and needs to be allocated to different control loops [30], or assumes that only a single controller can access the communication medium at each sampling instant [19]. The paper [14] includes detailed models of the communication system, but considers simple network topologies and is neither modular nor optimal. The paper [18] focuses on co-design of contention-based medium access and networked estimation and studies the dependencies between the number of contenders, the sampling interval, and the latency and loss distributions of sensor-estimator communication. For *Wireless*HART networks, our earlier paper [17] argues for structuring the communication schedule into network primitives such as unicast and convergecast and develops latency-optimal schedules under the assumption that communication links are reliable. In parallel work to this paper, [22] has developed a controller-communication co-design approach to calculate sampling intervals of multiple controllers to optimize their overall control performance and ensure schedulability of the real-time communication. The co-design aspect investigates how the additional latency introduced by heuristic retransmission policies (which improve end-to-end reliability) impact the closed-loop performance. In our initial work [3], we have developed a framework to decompose the co-design problem into two well-defined control and communication subproblems. In this paper, we prove the optimality of the proposed co-design, and we thoroughly validate the framework with extensive numerical examples.

3 Model and problem formulation

This section summarizes the model and assumptions under which we are able to develop a modular co-design framework with provably optimal performance.

3.1 Process

We consider the control of a stochastic linear system

$$dx = Axdt + Budt + dv_c$$

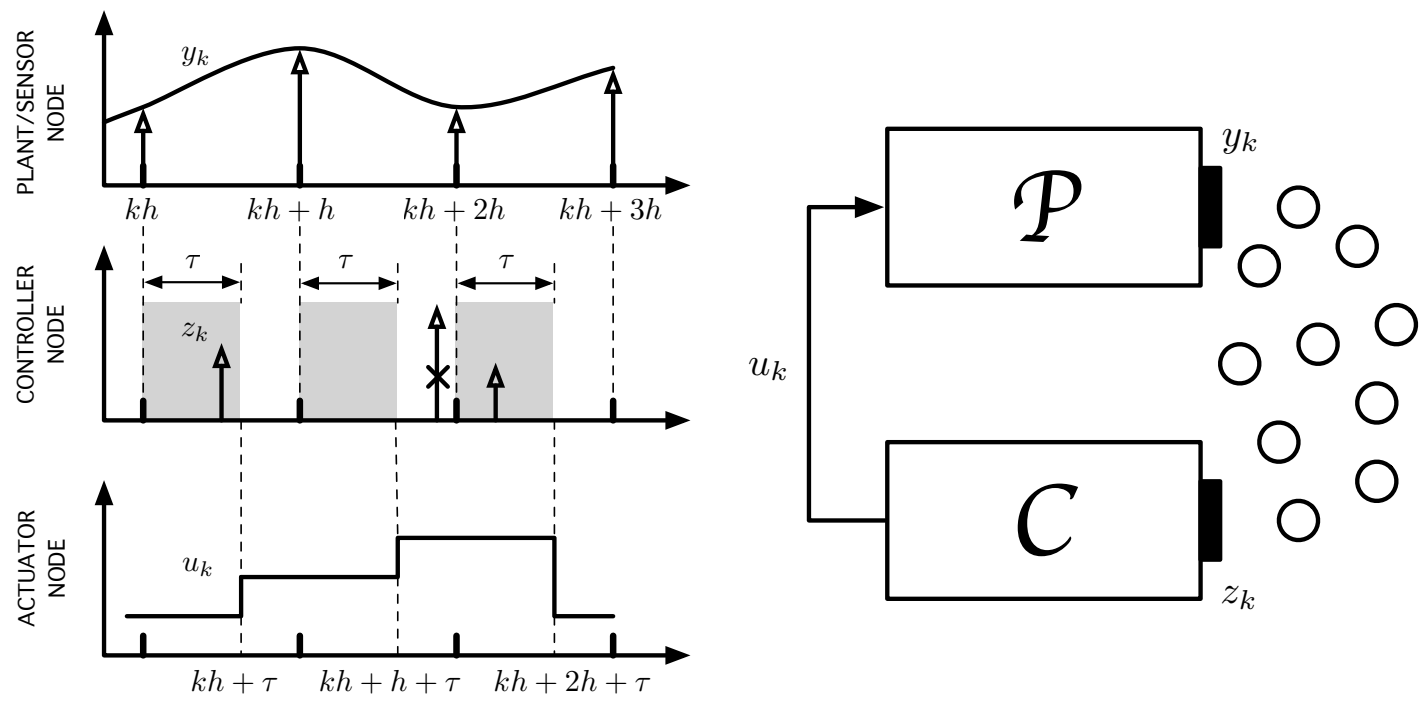

Figure 2: Networked control system block scheme with timing diagrams for sensor, controller and actuator nodes.

where $x \in \mathbb{R}^n$ is the state, $u \in \mathbb{R}^m$ is the control signal, $A \in \mathbb{R}^{n \times n}$ and $B \in \mathbb{R}^{n \times m}$ are the system matrices, and v_c is a Wiener process with incremental covariance R_v^c. We assume that a noisy measurement of the system output

$$y(kh) = \tilde{C}x(kh) + w(kh)$$

is taken every sample period h. Here $w(kh)$ is a discrete-time white noise Gaussian process, independent of the disturbance v_c, and with zero mean and covariance R_w. The sensor measurements are time-stamped and sent over an unreliable multi-hop network.

3.2 Network

The network consists of a set of nodes $\mathcal{N} = \{1, \ldots, N\}$ that can receive and transmit data to the other nodes. We represent the network topology with a directed acyclic graph (DAG) $\mathcal{G} = (\mathcal{N}, \mathcal{L})$ where the presence of a link $(n, m) \in \mathcal{L} \subseteq \mathcal{N} \times \mathcal{N}$ means that there is a non-zero probability that a packet transmitted by node n can be received and correctly decoded by node m. Methods for DAG constructions are out of the scope of this paper but can be found in *e.g.* [29].

Nodes are synchronized to the global clock and communication is slotted. Each slot is t_s milliseconds long and allows for the transmission of a single packet and the reception of the associated acknowledgement from the receiver. We assume that packet losses on links are independent from losses on other links, and that losses on each link $(n, m) \in \mathcal{L}$ follow a Bernoulli process with loss probability $p_{(n,m)}$. While the sensor data packets can be lost, we assume that acknowledgements can not. In this way, a transmitting node will always know if the packet was successfully decoded by the intended receiver. Nodes do not have access to channel state, only their statistics (*i.e.* packet loss probabilities on their outgoing links). The design problem for the network is to develop a *forwarding policy* π that determines if a node should forward a received packet or drop it, and to which node it should attempt to transmit.

3.3 Controller

The controller and actuator nodes are assumed to be synchronized to the global clock and operate with a fixed lag $\tau \leq h$ relative to the sampling times of the sensor. The controller uses the information available at times $kh + \tau$ to compute the control action, and the actuator uses zero-order-hold and maintains the same control action between the controller updates $[kh + \tau, (k + 1)h + \tau)$ for $k = 1, 2, \ldots$ as seen in Figure 2.

3.4 Codesign objective

This paper focuses on co-design of the forwarding policy and the control law to optimize a linear quadratic loss

$$J = \mathbf{E}\left\{ \int_0^T \begin{bmatrix} x(t) \\ u(t) \end{bmatrix}^T \begin{bmatrix} Q_{xx}^c & Q_{xu}^c \\ Q_{xu}^{cT} & Q_{uu}^c \end{bmatrix} \begin{bmatrix} x(t) \\ u(t) \end{bmatrix} dt + x^T(T) Q_0^c x(T) \right\}, \tag{1}$$

where the matrices Q_{xx}^c and Q_0^c are symmetric and positive semi-definite while Q_{uu}^c is symmetric and positive definite. The expectation is taken over the random process and measurement disturbances, as well as over the random packet losses in the network.

The codesign problem is now one of jointly optimizing the sampling interval h, the forwarding policy π used by the network nodes, and the control law for computing the actuator commands. It is important to notice that closed-loop loss is stated in continuous time to allow for comparison of solutions that use different sampling intervals.

4 A modular co-design framework

The key contribution of this paper is the development of an optimal and modular co-design framework for linear-quadratic control over unreliable multi-hop networks. The framework is modular since it seperates the co-design framework into well-defined and meaningful networking and control tasks. It is optimal because it allows to find the jointly optimal networking and control design subject to our assumptions and restrictions. In this section, we describe the rationale behind our framework, define the networking and control subproblems and show how they are coordinated. The rest of the paper is then devoted to solving these problems, establishing optimally of the overall design, and demonstrating the effectiveness of the framework on numerical examples.

The aim of co-design is to solve

$$\underset{h,\pi,u}{\text{minimize}} \quad J$$

where J is the closed-loop continuous-time linear-quadratic loss (1), and h, π, u indicates that we optimize over the sampling period of the sensor, the forwarding policy used by network nodes, and the control algorithm.

After solving the optimal control problem, we can re-write our optimization problem on the form

$$\underset{h,\pi}{\text{minimize}} \quad J^\star\big(\mathcal{D}(\pi, h), h\big) \tag{2}$$

where $\mathcal{D}(\pi, h)$ is the packet delay distribution for the forwarding policy π when sensor packets are injected with the rate $1/h$. Here, $J^\star(\mathcal{D}(\pi, h), h)$ denotes the optimal control loss for the given networking parameters. Although it is possible to compute $J^\star(\mathcal{D}(\pi, h), h)$ (see *e.g.* [4]), little is known about how the optimal control performance depends on the networking parameters. This limits our ability to efficiently solve the networking problem (2) to optimality. Moreover, even if we could solve the problem to optimality, the networking problem is tightly coupled with the control design task and the resulting co-design framework would not be modular.

It is, however, possible to develop an optimal and modular co-design framework when we restrict our attention to the time-triggered control architecture described in Section 3.3. Nilsson [16] demonstrated that this control structure is suboptimal and that better performance can be obtained by an event-triggered architecture that acts immediately as data arrives. However, not only does the time-triggered assumption simplify the networking and control design, but it also makes the optimal control performance amendable to analysis and will allow us to establish optimality of our framework. For this reason, only the packets that are recieved within τ seconds from when they were sampled are used by the controller. Let $\rho(\pi, h, \tau)$ be the probability that packets injected at the rate $1/h$ and forwarded using policy π arrive at the controller within τ seconds. The co-design problem then becomes

$$\underset{h,\pi}{\text{minimize}} \quad J^\star\big(\tau, \rho(\pi, h, \tau), h\big)$$

where τ is a fixed sensor-to-controller delay. To limit the number of free parameters, we set the transmission delay τ equal to the sampling interval h, which results in the following form

$$\underset{h,\pi}{\text{minimize}} \quad J^\star\big(\rho(\pi, h), h\big)$$

Note that for fixed sampling interval, $J^\star$ now only depends on the reliability of end-to-end transmissions $\rho(\pi, h)$. While the networking subproblem is still coupled with the control design, we will demonstrate in Section 5.3 that the optimal control loss is monotone decreasing in the end-to-end reliability $\rho(\pi, h)$. Hence, it is optimal to schedule the network so as to maximize the *deadline-constrained reliability*, *i.e.* the probability that a packet will arrive at the controller node within a fixed delay. This implies that for a given sampling interval h and under the restriction of one-sample delayed time-triggered control architectures, the optimal co-designed system is obtained by (a) scheduling the network to maximize deadline-constrained reliability, and (b) computing the control action using the optimal linear-quadratic controller under packet loss. The system configuration that minimizes the continuous-time linear quadratic loss can then be obtained by a one-dimensional search to find the optimal sampling interval.

5 Co-design for linear-quadratic control

In this section, we will develop an optimal co-design for linear-quadratic control over a network where the loss process on individual links follow independent Bernoulli processes.

The *deadline-constrained maximum-reliability forwarding problem*, defined and solved in Section 5.1 provides the optimal network operation for a fixed sampling interval. The *optimal control under independent packet losses* is developed in Section 5.2. Finally, in Section 5.3 we establish the monotonicity properties of the optimal control cost that allows us to conclude optimality of our design framework.

5.1 Deadline-constrained maximum reliability forwarding

The data flow from sensor to controller node is periodic, with a new packet being produced every h seconds. Since the controller disregards packets that have not been delivered within a sample interval, nodes can drop packets that will not be able to meet their deadlines. Hence, there will be at most one sensor packet in the network at any point in time. Moreover, since the packet loss processes on links are memoryless, the optimal policy for the periodic flow can be constructed by the repeated application of the optimal forwarding policy for a single transient packet. In the *deadline-constrained maximum reliability* forwarding problem, we pose a strict deadline of $D = \frac{h}{t_s}$ time slots and look for forwarding policies that maximize the probability that the sensor packet is delivered to the gateway node (directly connected to the controller) within the deadline.

To solve this problem, we need to introduce some further notation. We let $\mathcal{O}(n)$ be the set of outgoing links of node n and d_n be the depth of node n in the DAG (*i.e.* the length of the shortest hop path in the DAG from node n to the gateway). At time slot t, let $d \triangleq D - t$ be the number of time slots remaining to the deadline, and let $r_n(d)$ denote the maximum achievable reliability for delivering a packet from node n to the gateway within d time slots. Without loss of generality, we let N be the gateway node and define $\mathcal{N}^- = \{1, \dots, N-1\}$ as the set of all other nodes.

Now, consider a node n that holds a single packet at $t = 0$ that should be delivered to the gateway N within a deadline of D time slots. The goal is to develop a forwarding policy that maximizes the probability of delivering the packet on time, and to compute the associated deadline-constrained maximum reliability $r_n(D)$. By definition,

$$r_N(d) = 1, \quad \forall\, 0 \leq d \leq D.$$

The maximum reliability and optimal forwarding policies of the other nodes can be found by dynamic programming step by step from $d = 1$ to $d = D$ with the initial condition

$$r_n(0) = 0, \quad \forall\, n \in \mathcal{N}^-.$$

At each step, a node $n \in \mathcal{N}^-$ holding a packet with d time slots until deadline has two choices as shown in Fig. 3: it can withhold its transmission, in which case

$$r_n(d) = r_n(d-1); \tag{3}$$

or it can forward the packet to the neighbor that yields the highest forwarding reliability

$$r_n(d) = \max_{(n,m)\in\mathcal{O}(n)} \{(1 - p_{(n,m)}) r_m(d-1) + p_{(n,m)} r_n(d-1)\}. \tag{4}$$

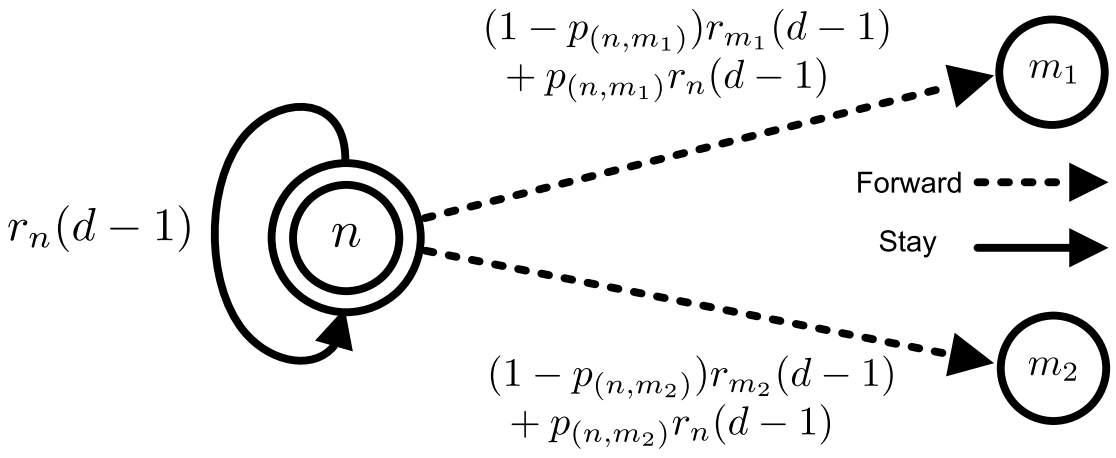

Figure 3: An illustration of deriving forwarding decisions at node n with deadline d.

The maximum forwarding reliability of node n is then the maximum of (3) and (4). Note that $r_n(d)$ is readily computed using information from the previous iteration, $d-1$, of the dynamic programming recursion. The next theorem characterizes the optimal forwarding policy and deadline-constrained maximum reliability.

Theorem 5.1 *The following policy $\pi^\star$ is optimal for the deadline-constrained maximum reliability forwarding problem: nodes $n \in \mathcal{N}^-$ drop packets when $d \in [0, d_n)$ and to attempt to transmit the packet to node*

$$m^\star = \min\left\{\arg \max_{(n,m)\in\mathcal{O}(n)} \{(1-p_{(n,m)})r_m(d-1) + p_{(n,m)}r_n(d-1)\}\right\} \tag{5}$$

when $d \in [d_n, D]$. The probability that the packet will be delivered at the gateway within the next d timeslots, $r_n(d)$, is given by

$$r_n(d) = \begin{cases} 0, & \text{if } d \in [0, d_n - 1]; \\ (1-p_{(n,m^\star)})r_{m^\star}(d-1) + p_{(n,m^\star)}r_n(d-1), & \text{if } d \in [d_n, D]. \end{cases} \tag{6}$$

Proof. Note that the theorem only gives one optimal policy out of possibly many. In particular, the min operator in (5) is used to get a unique forwarder, and transmitting even when the deadline can no longer be met would not increase the reliability. Let us now prove our claim.

First, let $d \in [0, d_n - 1]$. Since node n is at least d hops from the gateway, the packet cannot be delivered on time. Thus, $r_n(d) = 0$ for $d < d_n$ and it is optimal to withhold from transmitting and simply drop the packet.

For $d \in [d_n, D]$, we now establish that the optimal policy always attempts to transmit. To this end, we let $r_n^f(d)$ denote the maximum probability that the packet arrives at the gateway before deadline given that node n attempts to forward the packet when d time slots remain. It is equivalent to prove that $r_n^f(d) \geq r_n(d-1)$ for all $d \in [d_n, D]$. We then proceed by induction from $d = d_n$. Since the loss probabilities for all links in the DAG are strictly less than one, forwarding the packet on any of the shortest paths from n to the gateway has a non-zero probability to succeed, so $r_n^f(d_n) > 0$. On the other hand, the probability of meeting the deadline if node n witholds its transmission equals $r_n(d_n - 1) = 0$. Hence, $r_n^f(d_n) > r_n(d_n - 1)$, and it is optimal to attempt to forward the packet. Suppose that for a given d, we have $r_n^f(d) \geq r_n(d-1)$, and let m' be the optimal node for n to transmit to at this time. Then,

$$\begin{aligned} r_n^f(d+1) &= \max_{(n,m)\in\mathcal{O}(n)} \{(1-p_{(n,m)})r_m(d) + p_{(n,m)}r_n(d)\} \\ &\geq (1-p_{(n,m')})r_{m'}(d) + p_{(n,m')}r_n(d) \\ &\geq (1-p_{(n,m')})r_{m'}(d-1) + p_{(n,m')}r_n(d-1) = r_n^f(d) = r_n(d) \end{aligned}$$

Therefore, transmitting is optimal also at $d+1$. □

Theorem 5.1 implies that for any node n, we can compute $r_n(D)$ efficiently through Eqs. (5)-(6) using dynamic programming as in Algorithm 1. The optimal packet forwarding policy $\pi^\star$ is composed by the forwarding decision $m_n(d)$ for every node $n \in \mathcal{N}$ with all possible remaining time to deadline $d \in [0, D]$. Since the time complexity to compute $m^\star$ is proportional to $|\mathcal{O}(n)|$, the time complexity of the algorithm is $O(DN \max_n |\mathcal{O}(n)|)$.

Algorithm 1 Optimal forwarding policy

```
$r_n(d) = 0 \quad \forall n \in \mathcal{N},\ \forall d \in [0, D]; \qquad r_N(d) = 1 \quad \forall d \in [0, D]$
$m_n(d) = n \quad \forall n \in \mathcal{N},\ \forall d \in [0, D]$
for $d = 1$ to $D$ do
  for $n = 1$ to $N-1$ do
    if $d \geq d_n$ then
      compute $m^\star$ using Eq. (5), let $m_n(d) = m^\star$.
    end if
    compute $r_n(d)$ using Eq. (6).
  end for
end for
```

The deadline-constrained maximum reliability forwarding problem is rich and can be extended in many directions, *e.g.* to consider more realistic channel models where losses are correlated in time and nodes need to estimate channel states, to include the impact of power control to influence the packet loss probabilities on links, etc. Such extensions are outside the scope of this publication, but under current investigation in parallel work [32]. For an optimal solution to our co-design problem, however, the following observation is critical.

Lemma 5.1 *When the network operates under the optimal forwarding policy $\pi^\star$ computed in Theorem 5.1 with $Dt_s = h$, the packet loss process from a sensor located at node n and generating a new packet every h seconds is Bernoulli with success probability $\rho = r_n(D)$.*

Proof: The claim follows from the observation that the optimal policy is memoryless and that individual links follow Bernoulli processes.

Lemma 5.1 implies packets sent over the network operating under deadline-constrained maximum reliability forwarding are subject to a delay of Dt_s seconds and Bernoulli-losses with success parameter $\rho = r_n(D)$. From this perspective, Theorem 5.1 characterizes the

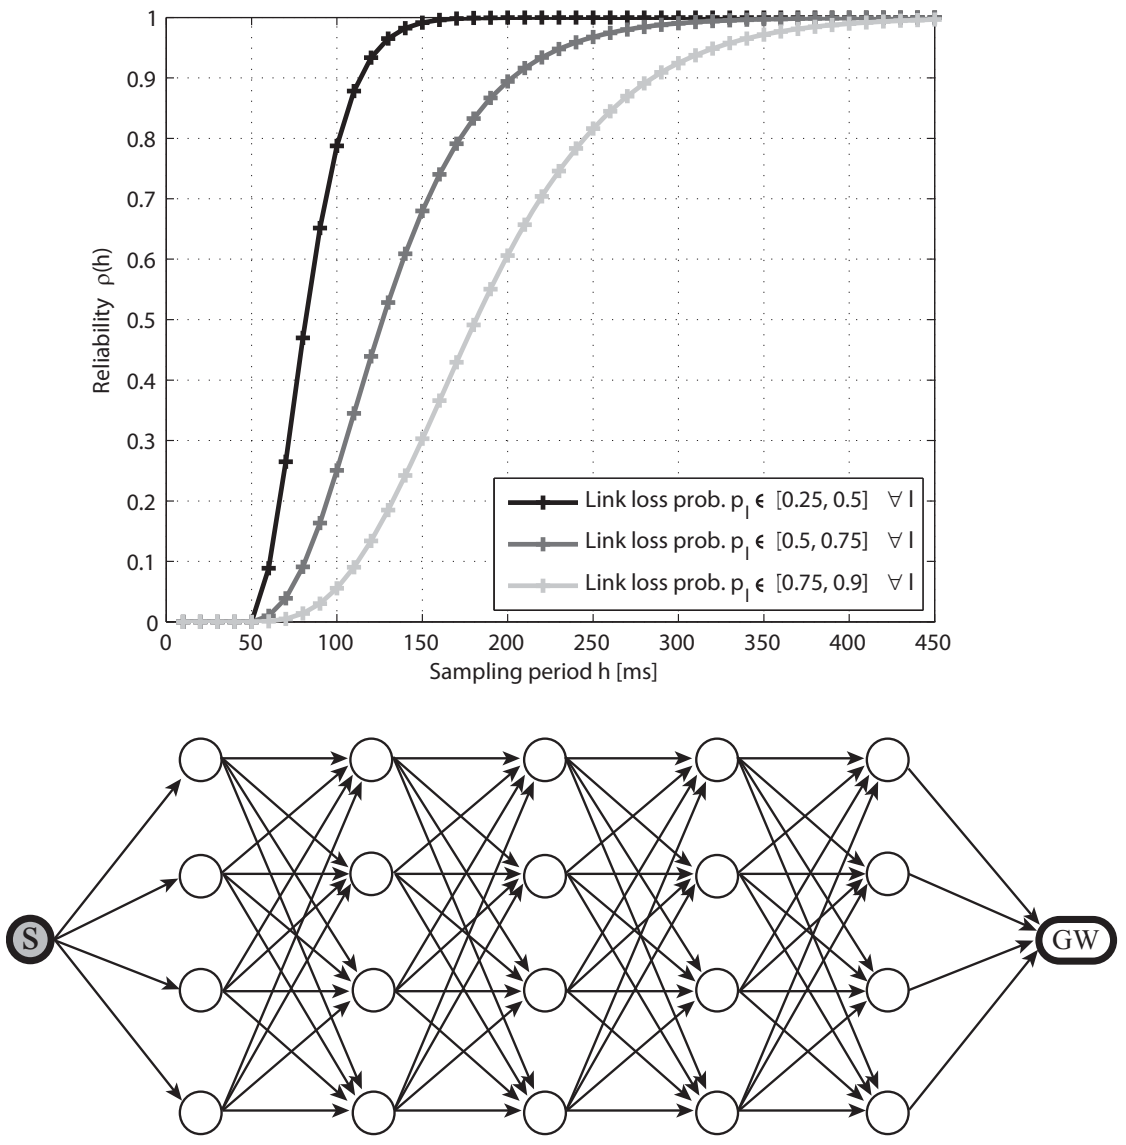

Figure 4: DAG routing topology with a sensor at 6-hop from the gateway.

achievable latency-reliability pairs (Dt_s, ρ) for a given network. Figure 4 illustrates this tradeoff for sampling times $h \in [0, 45]t_s$ with $t_s = 0.01$s and three scenarios in which the network becomes increasingly unreliable (by increasing the loss probabilities on links).

5.2 Linear quadratic Gaussian control for fixed forwarding policy

Under deadline-constrained maximum reliability forwarding, the network delivers sensor packets with a fixed delay of $\tau = Dt_s$ seconds and losses samples independently with probability $1 - r_n(D)$. We are interested in controllers that work on the information available at times $kh + \tau$, hold the control signal constant over intervals $[kh + \tau, (k + 1)h + \tau)$, and use control actions that are optimal in the sense of the linear-quadratic loss function (1).

For notational convenience, we assume that $T = Nh$ for some integer $N > 0$. Let $u_k = u(kh)$ be the control signal computed at time $kh + \tau$ and applied to the process during the time interval $[kh+\tau, (k+1)h+\tau)$ and let $x_k = x(kh)$. Then, the continuous-time loss function (1) can be transformed into an equivalent discrete-time loss

$$J = \mathbf{E}\left\{ \sum_{k=0}^{N-1} \left[\begin{array}{c} x_k \\ u_{k-1} \\ \hline u_k \end{array}\right]^T \left[\begin{array}{cc|c} \multicolumn{2}{c|}{\overbrace{\begin{matrix} Q_{xx}(\tau) + \Phi^T(\tau)Q_{xx}(\tau)\Phi(\tau) & Q_{xu}(\tau) + \Phi^T(\tau)Q_{xx}(h-\tau)\Gamma(\tau) \\ \star & Q_{uu}(\tau) + \Phi^T(\tau)Q_{xx}(h-\tau)\Gamma(\tau) \end{matrix}}^{\triangleq\, \Xi_{\xi\xi}}} & \overbrace{\begin{matrix} \Phi^T(\tau)Q_{xu}(h-\tau) \\ \Gamma^T(\tau)Q_{xu}(h-\tau) \end{matrix}}^{\triangleq\, \Xi_{\xi u}} \\ \hline \star & \star & \underbrace{Q_{uu}(h-\tau)}_{\triangleq\, \Xi_{uu}} \end{array}\right] \left[\begin{array}{c} x_k \\ u_{k-1} \\ \hline u_k \end{array}\right] + \begin{bmatrix} x_N \\ u_{N-1} \end{bmatrix}^T \underbrace{\begin{bmatrix} Q_0^c & 0 \\ 0 & 0 \end{bmatrix}}_{\triangleq\, \Xi_0} \begin{bmatrix} x_N \\ u_{N-1} \end{bmatrix} \right\}, \tag{7}$$

where $\Phi(t) = e^{At}$, $\Gamma(t) = \int_0^t \Phi(s)Bds$, $Q_{xx}(t) = \int_0^t \Phi^T(s)Q_{xx}^c\Phi(s)ds$, $Q_{xu}(t) = \int_0^t \Phi^T(s)\big(Q_{xx}^c\Gamma(s) + Q_{xu}^c\big)ds$ and $Q_{uu}(t) = \int_0^t \big(\Gamma^T(s)Q_{xx}^c\Gamma(s) + 2\Gamma^T(s)Q_{xu}^c + Q_{uu}^c\big)ds$.

The optimal control problem is then to compute the control sequence $\{u_k\}$ that minimizes the discrete-time loss function. The evolution of the system between sampling instants can be described in terms of the extended state vector $\xi_k \triangleq \mathrm{col}\{x_k, u_{k-1}\}$ as

$$\xi_{k+1} = \underbrace{\begin{bmatrix} e^{Ah} & \int_h^{h-\tau} e^{As} ds B \\ 0_{m\times n} & 0_{m\times m} \end{bmatrix}}_{\triangleq\, \Phi(h,\tau)} \xi_k + \underbrace{\begin{bmatrix} \int_0^{h-\tau} e^{As} ds B \\ I_{m\times m} \end{bmatrix}}_{\triangleq\, \Gamma(h,\tau)} u_k + \underbrace{\begin{bmatrix} I_{n\times n} \\ 0_{m\times n} \end{bmatrix}}_{\triangleq\, G} v_k \ ,$$

$$y_k = \rho_k \underbrace{\begin{bmatrix} \tilde{C} & 0_{1\times m} \end{bmatrix}}_{\triangleq\, C} \xi_k + w_k \ ,$$

where v_k and w_k are zero mean discrete-time Gaussian white noise process with

$$\mathbf{E}\left\{ \begin{bmatrix} v_k \\ w_k \end{bmatrix} \begin{bmatrix} v_k^T & w_k^T \end{bmatrix} \right\} = \begin{bmatrix} R_v & 0 \\ 0 & R_w \end{bmatrix} \ , \tag{8}$$

where $R_v \triangleq \int_0^h e^{As} R_v^c e^{A^T s} ds$.

Note that u_k is not computed until time $t = kh + \tau$, at which time y_k is available to the controller unless it has been dropped by the network. Hence, the controller has access to the following information set when computing u_k:

$$\mathcal{I}_k \triangleq \{\mathcal{Y}_k \, , \mathcal{U}_{k-1} \, , \mathcal{R}_k\} \ ,$$

Here, $\mathcal{Y}_k = (y_k, \ldots, y_1)$, and $\mathcal{U}_{k-1} = (u_{k-1}, \ldots, u_1)$, while $\mathcal{R}_k = (\rho_k, \ldots, \rho_1)$ is the realizations of the Bernoulli random variable ρ_k that models successful packet transmissions. It is important to note that the discrete-time loss has cross-terms even if the continuous-time loss function does not. The authors in [23] studied a similar problem without cross-terms in the loss function. In what follows, we extend the framework of [23] to include the cross-coupling terms in the loss function and derive the optimal controller and bound its performance.

5.2.1 Estimator Design

As in [23] the Kalman filter is the optimal estimator for our setting. The minimum mean square error (MMSE) estimate $\hat{\xi}_{k|k}$ of ξ_k given by $\hat{\xi}_{k|k} = \mathbf{E}\{\xi_k | \, \mathcal{I}_k\}$ can be computed recursively starting from the initial conditions $\hat{\xi}_{0|-1} = \mathrm{col}\{0_{n\times 1}, \ 0_{m\times 1}\}$ and $P_{0|-1} = P_0$. The innovation step is

$$\hat{\xi}_{k+1|k} \triangleq \mathbf{E}\{\xi_{k+1} | \, \mathcal{I}_k\} = \Phi \hat{\xi}_{k|k} + \Gamma u_k \tag{9}$$

$$e_{k+1|k} \triangleq \xi_{k+1} - \hat{\xi}_{k+1|k} = \Phi e_{k|k} + G v_k \tag{10}$$

$$P_{k+1|k} \triangleq \mathbf{E}\{e_{k+1|k} e_{k+1|k}^T | \, \mathcal{I}_k\} = \Phi P_{k|k} \Phi^T + \tilde{R}_v \tag{11}$$

where $\tilde{R}_v \triangleq G R_v G^T$ and v_k is independent from $\mathcal{I}_k$, while the correction step is

$$\hat{\xi}_{k+1|k+1} = \hat{\xi}_{k+1|k} + \rho_{k+1} K_{k+1}(z_{k+1} - C\hat{\xi}_{k+1|k}) \tag{12}$$

$$e_{k+1|k+1} = \xi_{k+1} - \hat{\xi}_{k+1|k+1} \tag{13}$$

$$P_{k+1|k+1} = P_{k+1|k} - \rho_{k+1} K_{k+1} C P_{k+1|k} \tag{14}$$

$$K_{k+1} \triangleq P_{k+1|k} C^T (C P_{k+1|k} C^T + R_w)^{-1} \, . \tag{15}$$

The following result, similar to [23], characterizes the estimation error covariance matrix.

Proposition 5.1 *The MMSE estimate* $\hat{\xi}_{k|k}$ *of* ξ_k *is given by the time-varying Kalman filter (9) – (15). The expected value of the covariance matrix can be bounded as*

$$\underline{P}_{k|k} \leq \mathbf{E}_\rho\{P_{k|k}\} \leq \overline{P}_{k|k}$$

where the bounds can be computed iteratively as

$$\begin{aligned}
\overline{P}_{k+1|k} &= \Phi\overline{P}_{k|k-1}\Phi^T + \tilde{R}_v - \rho\Phi\overline{P}_{k|k-1}C^T(C\overline{P}_{k|k-1}C^T + R_w)^{-1}C\overline{P}_{k|k-1}\Phi^T \\
\overline{P}_{k|k} &= \overline{P}_{k|k-1} - \rho\overline{P}_{k|k-1}C^T(C\overline{P}_{k|k-1}C^T + R_w)^{-1}C\overline{P}_{k|k-1} \\
\underline{P}_{k+1|k} &= (1-\rho)\Phi\underline{P}_{k|k-1}\Phi^T + \tilde{R}_v \\
\underline{P}_{k|k} &= (1-\rho)\underline{P}_{k|k-1}
\end{aligned}$$

starting from the initial conditions $\underline{P}_{0|-1} = \overline{P}_{0|-1} = P_0$. *When* $k \to \infty$, *the iterations converge to the unique stationary solutions* $\underline{P}_\infty$ *and* $\overline{P}_\infty$ *of the modified algebraic Riccati equations*

$$\overline{P}_\infty = \Phi\overline{P}_\infty\Phi^T + \tilde{R}_v - \rho\Phi\overline{P}_\infty C^T(C\overline{P}_\infty C^T + R_w)^{-1}C\overline{P}_\infty\Phi^T \, , \tag{16}$$

$$\underline{P}_\infty = (1-\rho)\Phi\underline{P}_\infty\Phi^T + \tilde{R}_v \, . \tag{17}$$

5.2.2 Controller Design

Next, we develop the optimal state feedback control law.

Proposition 5.2 *Consider the aforementioned finite horizon LQG control problem. The optimal control law*

$$u_k = -\underbrace{(\Gamma^T S_{k+1}\Gamma + \Xi_{uu})^{-1}(\Gamma^T S_{k+1}\Phi + \Xi_{\xi u}^T)}_{L_k}\hat{\xi}_{k|k} \tag{18}$$

is a linear function of the estimated state. The matrix S_k *evolves according to the backward Riccati recursion*

$$S_k = \Phi^T S_{k+1}\Phi + \Xi_{\xi\xi} - (\Phi^T S_{k+1}\Gamma + \Xi_{\xi u})(\Gamma^T S_{k+1}\Gamma + \Xi_{uu})^{-1}(\Gamma^T S_{k+1}\Phi + \Xi_{\xi u}^T) \, , \tag{19}$$

where $\hat{\xi}_{k|k}$ is the MMSE estimate of the state ξ_k based on the information set $\mathcal{I}_k$ computed with the Kalman filter (9)–(15). As $k \to \infty$, the Riccati recursion converges to a unique stationary solution S_∞ satisfying

$$S_\infty = \Phi^T S_\infty \Phi + \Xi_{\xi\xi} - (\Phi^T S_\infty \Gamma + \Xi_{\xi u})(\Gamma^T S_\infty \Gamma + \Xi_{uu})^{-1}(\Gamma^T S_\infty \Phi + \Xi_{\xi u}^T)$$

for which the associated stationary controller gain is

$$L_\infty \triangleq \lim_{k\to\infty} L_k = -(\Gamma^T S_\infty \Gamma + \Xi_{uu})^{-1}(\Gamma^T S_\infty \Phi + \Xi_{\xi u}^T) \ .$$

Proof. To derive the optimal feedback control law and the corresponding value for the objective function, we apply dynamic programming. We define the optimal value function $V_k(\xi_k)$ as follows:

$$V_k(\xi_k) \triangleq \min_{u_k} \mathbf{E}\{\xi_k^T \Xi_{\xi\xi}\xi_k + 2\xi_k^T \Xi_{\xi u} u_k + u_k^T \Xi_{uu} u_k + V_{k+1} |\ \mathcal{I}_k\} \ , \tag{20}$$

$$V_N(\xi_N) \triangleq \mathbf{E}\{\xi_N^T \Xi_0 \xi_N |\ \mathcal{I}_N\} \ , \tag{21}$$

where $k = \{N-1, \ldots, 1\}$. We show that $J_N^\star = V_0(\xi_0)$. The solution of the Bellman equation (20) with the initial condition (21) is given by

$$V_k(\xi_k) = \mathbf{E}\{\xi_k^T S_k \xi_k |\ \mathcal{I}_k\} + c_k \ , \tag{22}$$

where the nonnegative matrix S_k and the scalar c_k are independent of the information set $\mathcal{I}_k$. In contrast to [23], we allow for cross-coupling terms in the Bellman equation (20), which is critical for comparing the control costs under different sampling intervals. Apart from this, the proof is similar to the one in [2, 23]. □

5.2.3 Optimal control cost

The loss function of the finite horizon LQG for the networked control system can be written as

$$J_N^\star(\rho) = \xi_0^T S_0 \xi_0 + \mathrm{Tr}\big(S_0 P_0\big) + \sum_{k=0}^{N-1} \mathrm{Tr}\big(S_{k+1}\tilde{R}_v\big) + \sum_{k=0}^{N-1} \mathrm{Tr}\big((\Phi^T S_{k+1}\Phi + \Xi_{\xi\xi} - S_k)\mathbf{E}_\rho\{P_{k|k}\}\big) \ , \tag{23}$$

where expectation is taken over a Bernoulli sequence $\{\rho_k\}$ with $\mathbf{E}\{\rho_k\} = \rho$. Since no efficient way of computing the expectation is known, one can use the upper and lower bounds on $\mathbf{E}_\rho\{P_{k|k}\}$ given in Proposition 5.1 to compute associated upper and lower bounds on the finite-horizon control cost $J_N^{\min}(\rho) \le J_N^\star(\rho) \le J_N^{\max}(\rho)$. For the infinite horizon case, the bounds become

$$\begin{aligned} J_\infty^{\min} &\triangleq \lim_{N\to\infty} \frac{1}{N} J_N^{\min} \\ &= \mathrm{Tr}(S_\infty \tilde{R}_v) + (1-\rho)\mathrm{Tr}\big((\Phi^T S_\infty \Phi + \Xi_{\xi\xi} - S_\infty)\underline{P}_\infty\big) \ , \end{aligned} \tag{24}$$

$$\begin{aligned} J_\infty^{\max} &\triangleq \lim_{N\to\infty} \frac{1}{N} J_N^{\max} \\ &= \mathrm{Tr}(S_\infty \tilde{R}_v) + \mathrm{Tr}\big((\Phi^T S_\infty \Phi + \Xi_{\xi\xi} - S_\infty)(\overline{P}_\infty - \rho\overline{P}_\infty C^T (C\overline{P}_\infty C^T + R_w)^{-1} C\overline{P}_\infty)\big) \ , \end{aligned} \tag{25}$$

where the matrices $\underline{P}_\infty$, $\overline{P}_\infty$ and S_∞, are given in Proposition 5.1 and Proposition 5.2, respectively.

To sum up, the optimal estimator is a time-varying Kalman filter given by (11), (14) and (15), while the control law is a static linear feedback (18). The combined performance, in the sense of the continuous-time loss function (1), can be bounded as in (24) and (25). It is this controller and these performance bounds that we will use in our co-design.

5.3 Optimality of the co-design framework

It makes intuitive sense that the achievable control loss is increasing with increasing loss rates in the network. Next, we will give a formal proof that the achievable loss for a fixed sampling interval is indeed increasing in the loss probability, which allows us to conclude that the combination of linear-quadratic control under loss and deadline-constrained maximum reliability routing provides the optimal co-design for a given sampling interval.

Lemma 5.2 *Consider operators* $f(X) = \Phi X \Phi^T + \tilde{R}_v$, $h_\rho(X) = X - \rho X C^T (C X C^T + R_w)^{-1} C X$ *and* $g_\rho(X) = h_\rho(f(X))$. *If* $X' \leq X$ *and* $\rho' \geq \rho$, *then* $g_{\rho'}(X') \leq g_\rho(X)$.

Proof. By Lemma 8.1(a,c), $g_{\rho'}(X') \leq g_\rho(X') \leq g_\rho(X)$. □

Theorem 5.2 *For given sampling interval* h, *the optimal control loss* $J_N^\star(\rho)$ *is monotone decreasing in end-to-end reliability* ρ.

Proof. Our proof relies on a coupling argument [12] on the underlying end-to-end loss processes. Specifically, for any two Bernoulli processes $\{\rho_k\}$ and $\{\rho'_k\}$ with $\mathbf{E}\{\rho_k\} = \rho$ and $\mathbf{E}\{\rho'_k\} = \rho'$ such that $\rho \leq \rho'$ we establish that $J_N^\star(\rho') \leq J_N^\star(\rho)$.

The key idea of coupling is to define the two processes on a common probability space on which the analysis is carried out. To this end, let $\{\omega_k\}$ be a sequence of independent random variables with $\omega_k \sim \mathcal{U}[0,1]$ and define $\rho_k = \mathbb{1}_{\omega_k \leq \rho}$ and $\rho'_k = \mathbb{1}_{\omega_k \leq \rho'}$. Then $\{\rho_k\}$ and $\{\rho'_k\}$ are Bernoulli trial processes with probabilities ρ and ρ', respectively. A crucial property of our construction is that for every realization $\{\omega_k\}$, the associated sequences $\{\rho_k(\omega_k)\}$ and $\{\rho'_k(\omega_k)\}$ satisfy $\rho'_k(\omega_k) \geq \rho_k(\omega_k)$ for all k. In particular, whenever the more reliable sequence has a loss, the less reliable sequence also has a loss.

Our next step is to show that $P'_{N|N} \leq P_{N|N}$ where $P'_{N|N}$ is the estimation error covariance matrix under packet delivery sequence $\{\rho_k\}$ and initial value $P'_{0|0} = P_0$ and $P_{N|N}$ is the estimation error covariance matrix under packet delivery sequence $\{\rho'_k\}$ and the same initial value $P_{0|0} = P_0$. We will establish this claim using induction. Clearly, $P'_{k|k} \leq P_{k|k}$ holds for $k = 0$. Assume that it holds for an arbitrary k. Then, since $P_{k+1|k+1} = g_\rho(P_{k|k})$ and $P'_{k+1|k+1} = g_{\rho'}(P'_{k|k})$, Lemma 5.2 implies that $P'_{k+1|k+1} \leq P_{k+1|k+1}$. Hence, by induction, $P'_{N|N} \leq P_{N|N}$.

Finally, combining this observation with Lemma 8.2:

$$\begin{aligned}
J_N^\star(\rho) &= c + \mathop{\mathbf{E}}_{\rho_1,\rho_2,\ldots,\rho_N} \sum_{k=0}^{N-1} \operatorname{Tr} \Delta_k P_{k|k}(\rho) \\
&= c + \mathop{\mathbf{E}}_{\omega_1,\ldots,\omega_N} \sum_{k=0}^{N-1} \operatorname{Tr} \Delta_k P_{k|k}(\rho(\omega)) \\
&\leq c + \mathop{\mathbf{E}}_{\omega_1,\ldots,\omega_N} \sum_{k=0}^{N-1} \operatorname{Tr} \Delta_k P_{k|k}(\rho'(\omega)) \\
&= c + \mathop{\mathbf{E}}_{\rho'_1,\ldots,\rho'_N} \sum_{k=0}^{N-1} \operatorname{Tr} \Delta_k P_{k|k}(\rho') = J_N^\star(\rho') \ .
\end{aligned}$$

This concludes the proof. □

Theorem 5.2 allows us to establish optimality of our co-design framework.

Theorem 5.3 *For given sampling interval, the optimal closed loop performance in the sense of the linear-quadratic control loss (1) is obtained by scheduling the network to maximize deadline-constrained reliability and computing the control action by the time-varying LQG-controller (9)-(15), (18), (19).*

Theorem 5.3 establishes that the optimal co-design can be obtained as follows: we sweep over the sampling interval h, schedule the network to maximize on-time delivery probability, and estimate the associated closed-loop performance of the time-varying LQG controller for the corresponding end-to-end reliability ρ. The optimal co-design is obtained for the sampling interval that attains the minimal closed-loop loss.

It is natural to ask if one could find the optimal h in a more efficient way than by exhaustive search. We will show in the numerical examples that the optimal loss as a function of h might exhibit multiple local minima, which indicates that it would be challenging to find a universal and efficient way of picking the optimal sampling interval. Another issue is that there is no efficient way to compute the expectation of the covariance matrix with respect to the loss process apart from *e.g.* Monte Carlo simulation [25]. To overcome this problem, one could replace the true performance expression by the upper bound $J_N^{\max}(\rho)$ and pick the sampling interval that minimizes this upper bound. The next result establishes that $J_N^{\max}$ has the same monotonicity properties as $J_N^\star$, and we will show in the numerical examples that $J_N^{\max}$ provides a good surrogate to the true loss function when it comes to picking the optimal sampling interval.

Lemma 5.3 *The upper bound on the control loss $J_N^{\max}(\rho)$ is monotone decreasing in end-to-end reliability ρ.*

Proof. Note that

$$J_\infty^{\max}(\rho) = c' + \operatorname{Tr} \Delta_\infty h_\rho(\overline{P}_\infty(\rho))$$

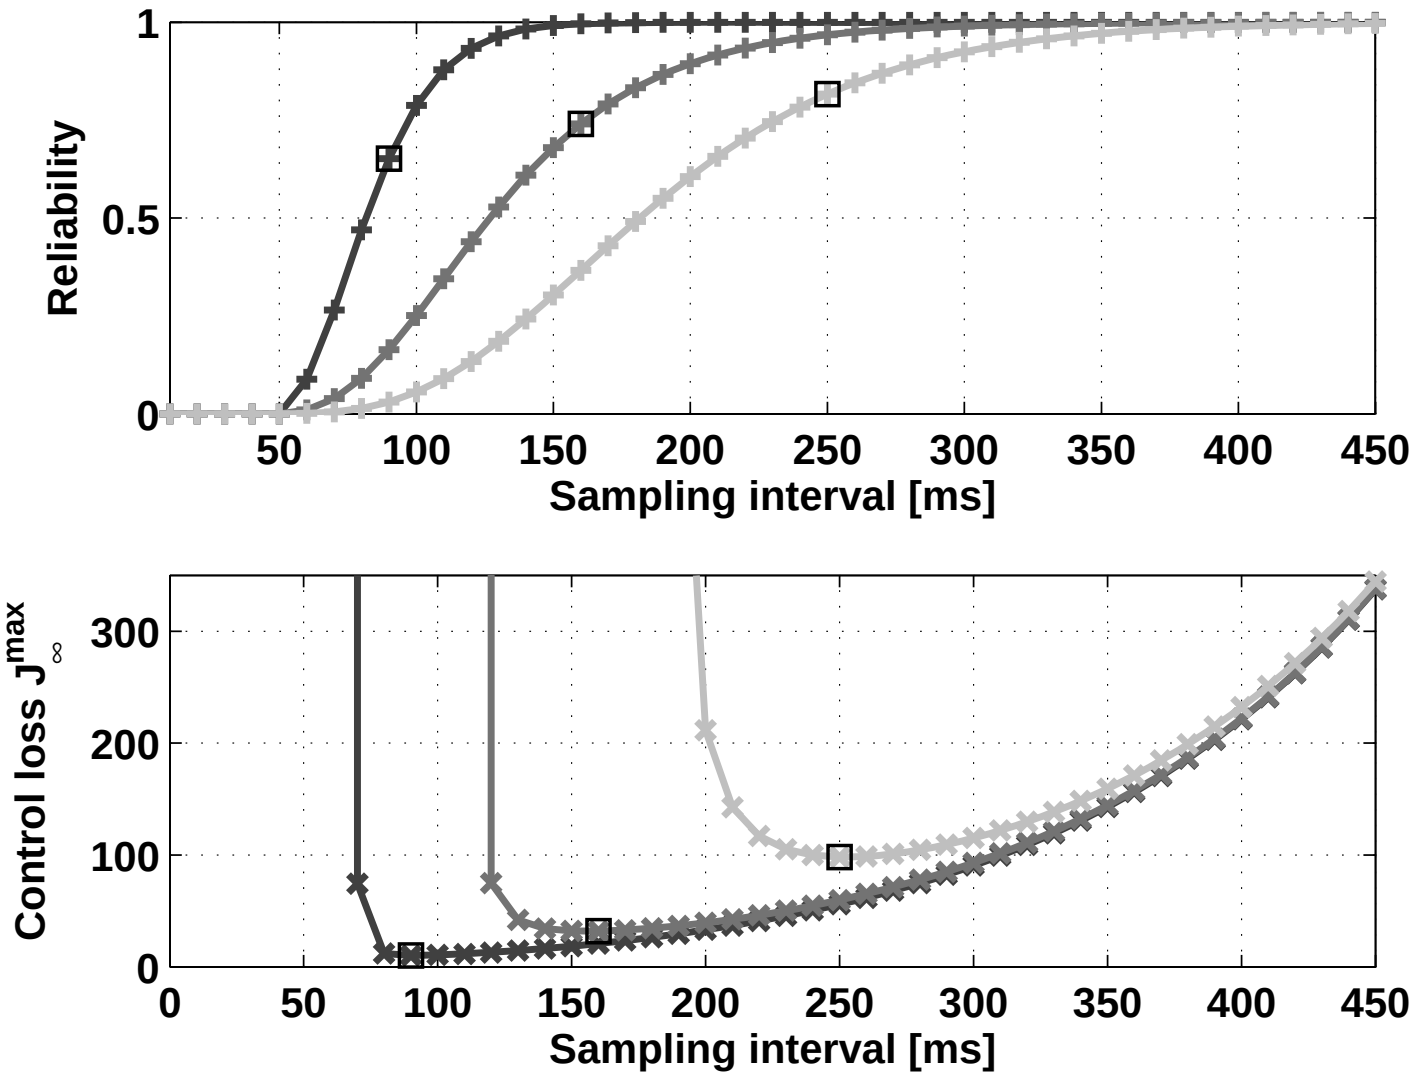

Figure 5: Comparison of the upper bounds $J_\infty^{\max}$ for three different cases.

where $\overline{P}_\infty(\rho)$ is the stationary solution of the modified algrabraic Riccati equation (16) for reliability parameter ρ. Now, consider two reliability parameters ρ and ρ'. By similar arguments as in Theorem 5.2, $\rho' \geq \rho$ implies that $\overline{P}_\infty(\rho') \leq \overline{P}_\infty(\rho)$ and by Lemma 8.1(b), $h_\rho(\overline{P}_\infty(\rho)) \leq h_{\rho'}(\overline{P}_\infty(\rho'))$. By Lemma 8.2, $J_\infty^{\max}(\rho') \leq J_\infty^{\max}(\rho)$. Our claim is proven. $\square$

6 Numerical Examples

We are now ready to demonstrate our co-design procedure on numerical examples. To this end, we consider the following second-order linear system

$$\begin{aligned} dx &= \begin{bmatrix} 0 & 1 \\ -\omega_0^2 & -2\alpha\zeta\omega_0 \end{bmatrix} x dt + \begin{bmatrix} 0 \\ \omega_0^2 \end{bmatrix} u dt + dv_c \ , \\ y(kh) &= \begin{bmatrix} 1 & 0 \end{bmatrix} x(kh) + w(kh), \end{aligned} \tag{26}$$

where v_c has incremental covariance $R_v^c = \text{diag}\{0.5, 0.5\}$, and $w(kh)$ has covariance $R_w = 10^{-4}$. Our joint design should minimize (1) for $Q_{xx}^c = \text{diag}\{2, 1\}$, $Q_{xu}^c = 0_{2\times 1}$, $Q_{uu}^c = 1$, and $Q_0^c = 0_{2\times 2}$.

Initially, we consider the system (26) to be unstable with the parameters $\alpha = -1$, $\zeta = 1$, and $\omega_0 = 1$. Periodic samples of the output $y(kh)$ are transmitted over the multi-hop wireless network of Figure 4 with the same link reliabilities as described in Section 5.1. For every $h \in [6, 45]t_s$, we compute the optimal forwarding policy and the associated deadline-constrained reliability using Theorem 5.1. Then, we discretize the control loss function (1), solve the corresponding LQG optimal control problem, and evaluate its performance as described in Section 5.2. Figure 5 shows the optimal closed-loop control losses for varying sampling intervals under the three network scenarios as

Table 1: Selection of sampling interval h in the wireless control system that includes communication links with loss probability $p_l \in [0.75, 0.9]$

ζ	ω_0	h (Rule of Thumbs)	$h^\star$ (Optimal sampling interval)
0.1	$\frac{\pi}{\sqrt{1-\zeta^2}}$	40 – 90 ms	130 ms
0.2		40 – 100 ms	120 ms
0.7		50 – 120 ms	60 ms

introduced earlier in Figure 4. We note that there is no universal sampling interval or target end-to-end reliability. The optimal sampling interval ranges from 90ms for the most reliable network scenario to 250ms for the least reliable case, corresponding to a required end-to-end reliability of 65% and 82%, respectively. As the network becomes less reliable, more retransmissions (a longer $h^\star$) are required to guarantee a sufficiently high reliability which causes the associated control loss to increase. Specifically, the optimal control loss (marked with a square in Figure 5) increases about a factor of ten from the most to the least reliable network scenarios.

Now, we consider the case when the system (26) is stable, and $\zeta \geq 0$, $\alpha = 1$, and $\omega_0 = \pi/\sqrt{1-\zeta^2}$. This parameterization is chosen to yield roughly the same optimal sampling interval independent of ζ. Figure 6 shows how the trade-off curves change when we vary the damping of the system poles. Similar to the unstable open-loop systems, distinct co-design optima also exist for the open-loop stable systems, but they be come less relevant when the system poles are better damped. Furthermore, we compare the optimal sampling interval obtained by our co-design framework with the rules-of-thumb from [2, pp. 129-130]. As can be seen in Table 1, the optimal sampling interval is more often than not outside the range of sampling intervals proposed by the rule-of-thumb.

It may appear discomforting that our co-design framework requires sweeping over the sampling interval to find the jointly optimal design. However, as shown in Figure 7, the optimal closed-loop control cost as a function of sampling interval might exhibit multiple local minima, which indicates that it will be hard to circumvent this search in general.

A possible limitation of our design procedure is that we set the maximum transmission delay equal to the sampling interval to reduce the search space to a single parameter. One could imagine that a better performance could be achieved by optimizing over both the sampling interval and the transmission delay, which is indeed possible in our framework. While we cannot rule out this possibility in general, our experience is that the additional complexity of a two-dimensional search does not drastically improve the performance.

Finally, since the true closed-loop performance can only be evaluated using Monte Carlo simulations, it is useful to be able to rely on more easily computable upper and lower performance bounds, introduced in this paper, in the search for the optimal sampling interval. Figure 8 compares the upper, lower and true closed-loop performance for the co-design under the least reliable network scenario. The upper bound $J_N^{\max}$ be-

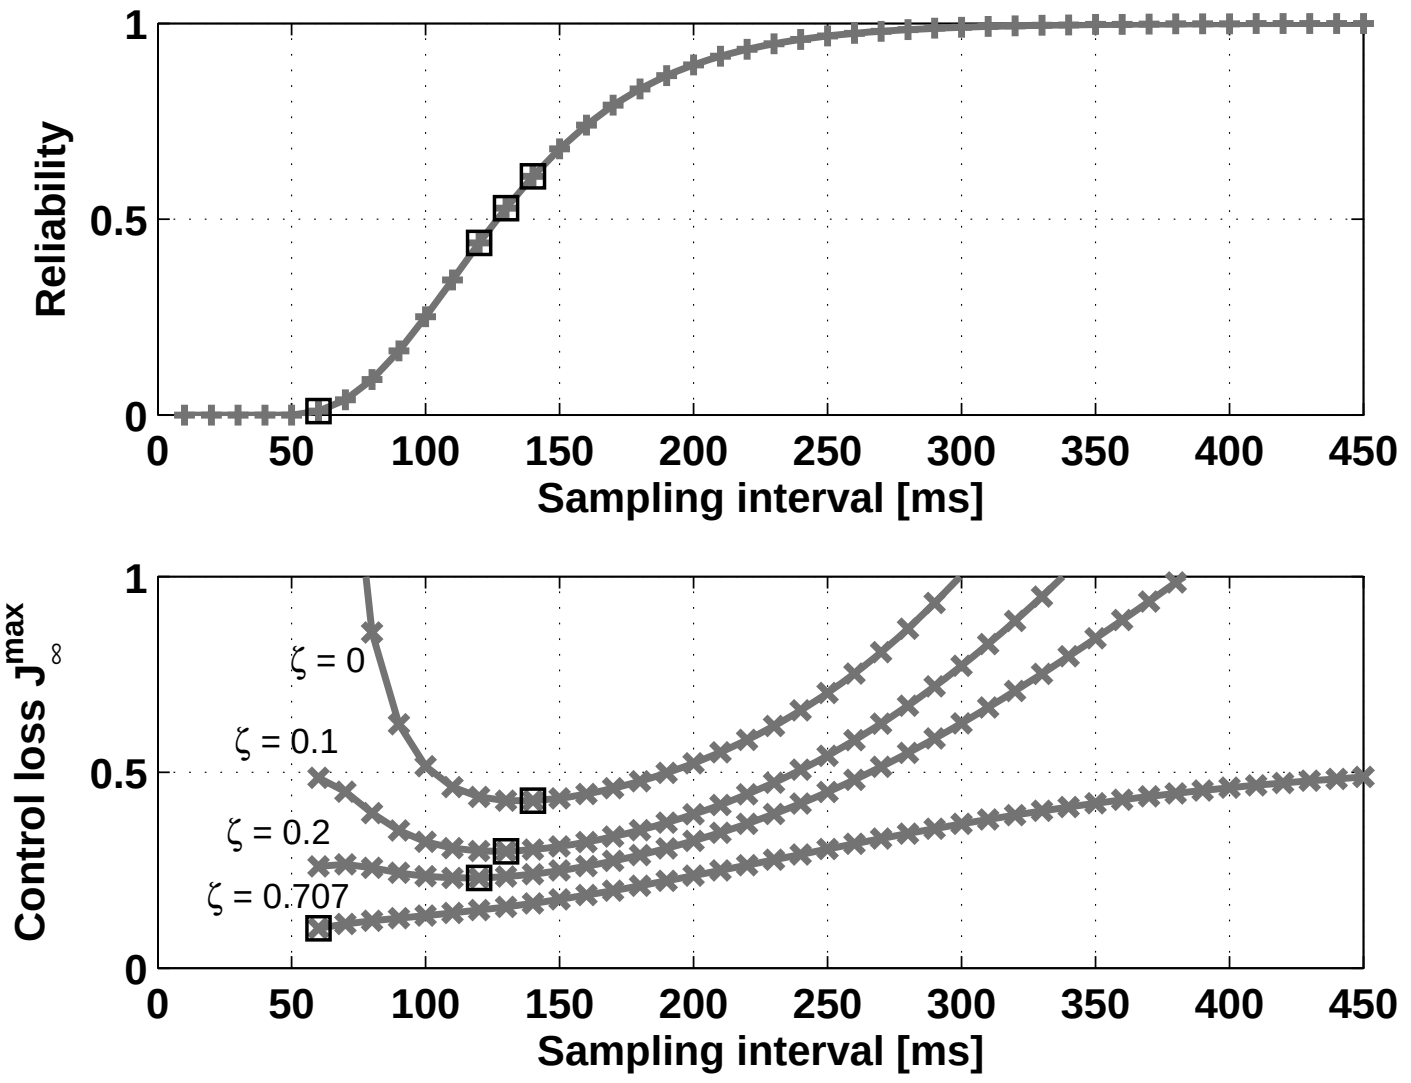

Figure 6: Comparision of the upper bounds $J_\infty^{\max}$ for the system (26) which is parameterized by several damping ratios ζ and natural frequencies $\omega_0 = \pi/\sqrt{1-\zeta^2}$.

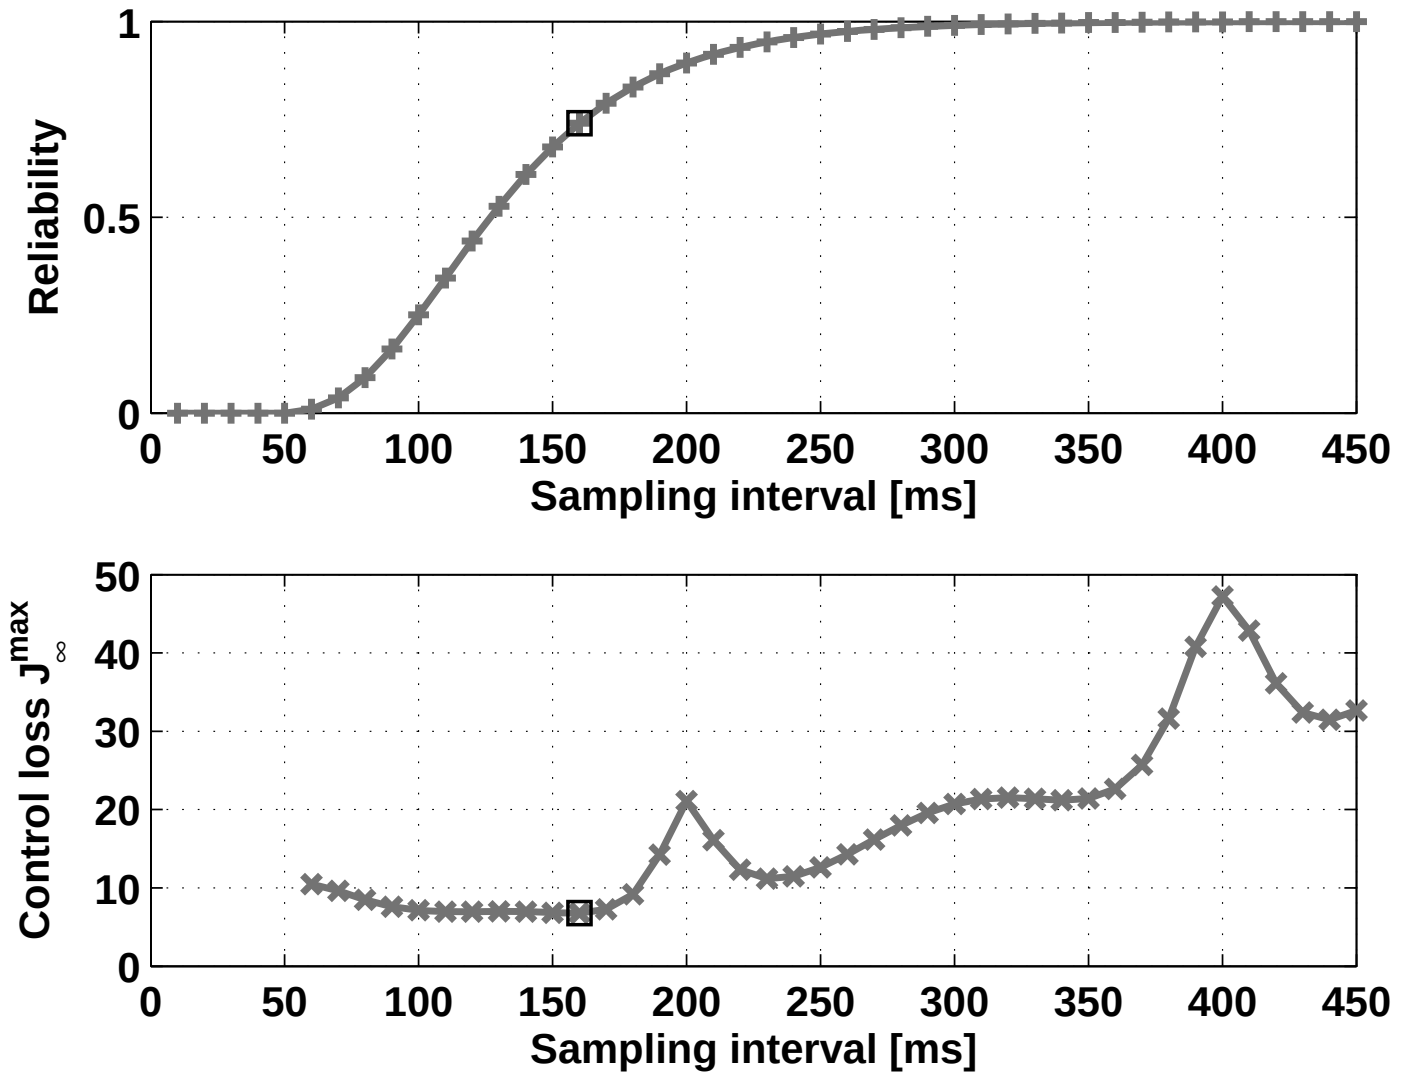

Figure 7: The upper bound $J_\infty^{\max}$ for the system (26) with the parameters $\zeta = 0.02$ and $\omega_0 = 5\pi$.

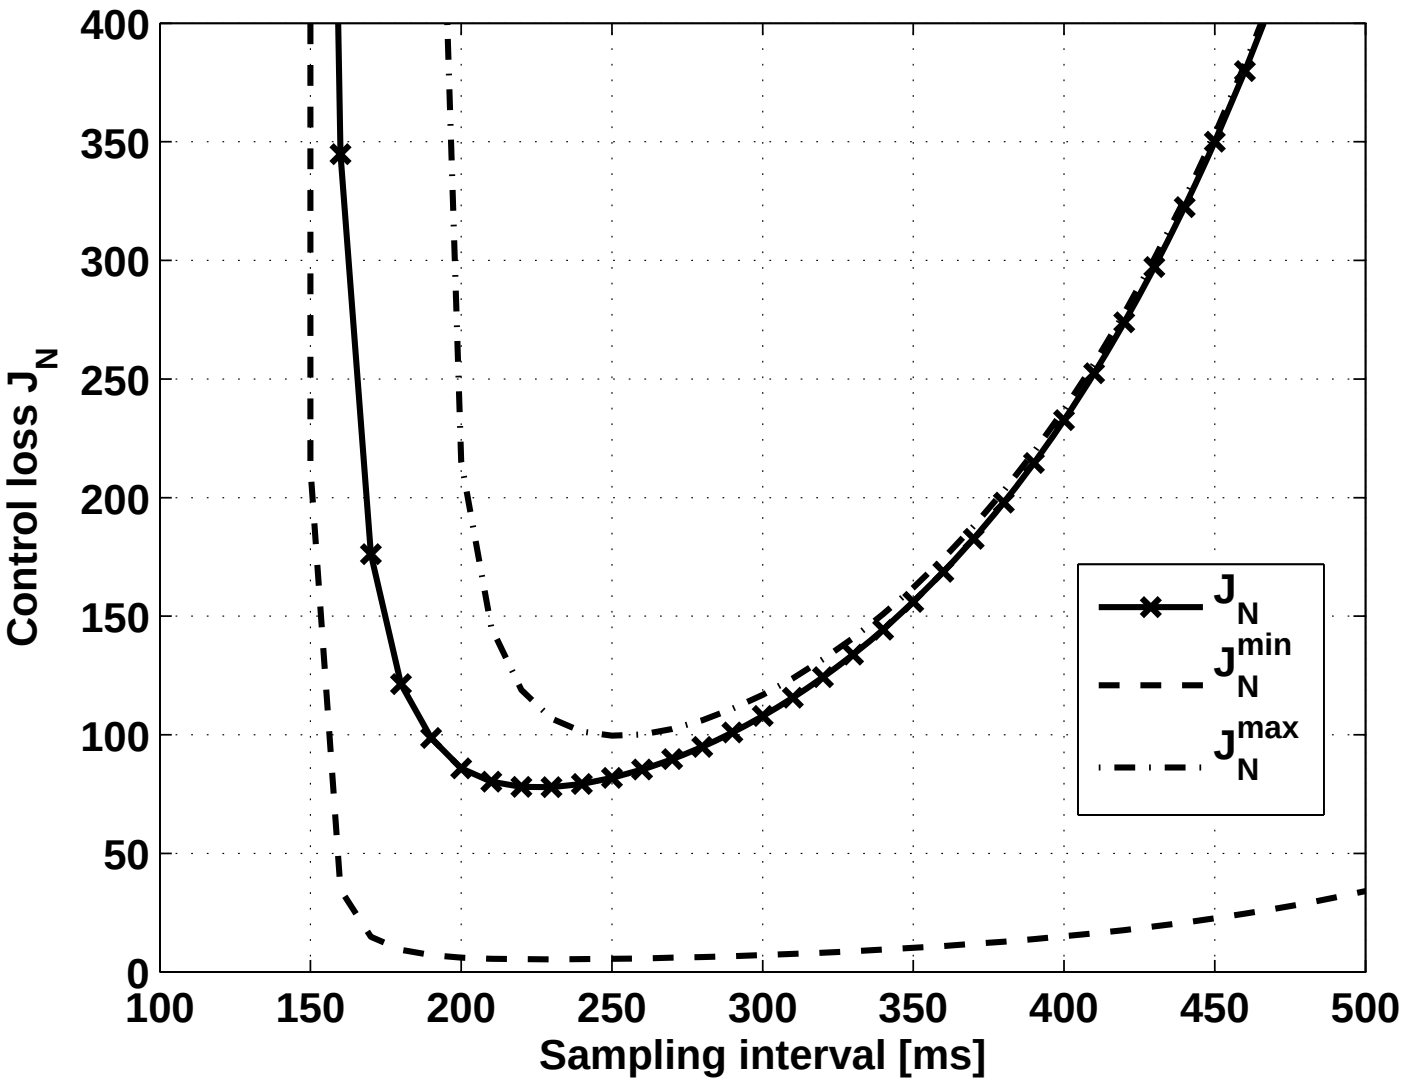

Figure 8: The experimental $J_N^\star$, upper bound $J_N^{\max}$ and lower bound $J_N^{\min}$ for the minimum control cost with respect to sampling period. The curves are obtained by averaging 10000 Monte Carlo simulations for the horizon length $T = 500\,s$, with the arrival sequence ρ_k generated randomly.

comes quite accurate for sampling intervals $h \geq 250$ms, and the sampling interval that minimizes the upper bound on the performance is rather close to the optimal sampling interval for the true cost. Hence, we believe that the upper bound is a good surrogate for the true performance if we need to carry out the co-design with limited computational resources.

7 Conclusions

We considered the joint design of forwarding policies and controllers for networked control loops that use multi-hop wireless communication for transmitting sensor data from process to controller. By parameterizing the design problem in terms of the sampling rate of the control loop, the co-design problem separates into two well-defined networking and control design tasks subproblem, both which admit optimal solutions: the network should be operated to maximize the delay-constrained reliability, and the control design should optimize closed-loop performance under packet loss. We illustrate how these problems can be solved, and how the jointly optimal design can be found by a one-dimensional search over the sampling interval. To the best of our knowledge, this is the first co-design procedure that covers such a breadth of design parameters while still guranteeing to find the joint design with optimal closed-loop performance.

Several natural extensions of our work can be considered. One is the multi-loop control problem, where multiple sensors take measurements with different sampling time and deadline. The corresponding networking task, however, becomes a real-time deadline-constrained multi-flow scheduling, which was recently proved to be NP-complete [20], so optimal designs will probably be hard to find. Another extension is to consider the optimal co-design of a system when also the actuation commands are forwarded over an unreliable wireless network. Finally, other sampling strategies, control structures, and performance objectives would also be interesting, challenging and possibly useful extensions.

Acknowledgements. The authors are grateful to Prof. Alexandre Proutiere for introducing them to the coupling method, and to Dr. Kin Sou and Dr. Daniel Lehmann for valuable comments on an earlier draft of this manuscript.

8 Appendix

Lemma 8.1 *For operators $g_\rho(X)$ and $h_\rho(X)$, matrices $X \in \mathbb{S}_+^n$ and $Y \in \mathbb{S}_+^n$ and scalars $\rho,\ \rho' \in [0,1]$, the following facts are true.*

$$\begin{array}{rrcl} a) & X \leq Y & \Rightarrow & g_\rho(X) \leq g_\rho(Y)\,. \\ b) & X \leq Y & \Rightarrow & h_\rho(X) \leq h_\rho(Y)\,. \\ c) & \rho \leq \rho' & \Rightarrow & g_\rho(X) \geq g_{\rho'}(X)\,. \\ d) & \rho \leq \rho' & \Rightarrow & h_\rho(X) \geq h_{\rho'}(X)\,. \end{array}$$

Proof. a) $g_\rho(X) \leq g_\rho(Y)$ holds as $g_\rho(X)$ is affine in X. Proof for this can be found in [25, Lemma 1(c)].

b) As h_ρ is a special form of g_ρ by setting $\Phi = I$ and $R_w = 0$, we immediately obtain the condition $h_\rho(X) \leq h_\rho(Y)$.

c) The detail proof is given in [25, Lemma 1(d)].

d) As h_ρ is a special form of g_ρ by setting $\Phi = I$ and $R_w = 0$, we easily conclude $h_\rho(X) \geq h_{\rho'}(X)$ from (c). ☐

Lemma 8.2 *Suppose $Y \in \mathbb{S}_+^n$ and $Z \in \mathbb{S}_+^n$. If $Y \leq Z$, then*

$$Tr(XY) \leq Tr(XZ) \quad \forall X \in \mathbb{S}_+^n\,. \tag{27}$$

Proof. Since $Y \leq Z$, it follows that

$$X^{\frac{1}{2}} Y X^{\frac{1}{2}} \leq X^{\frac{1}{2}} Z X^{\frac{1}{2}}\,.$$

Since trace is a monotone function on the positive definite matrices, we get

$$\mathrm{Tr}(XY) \leq \mathrm{Tr}(XZ)\,.$$

☐

References

[1] IEEE 802.15.4e.

[2] K. J. Åström and B. Wittenmark. *Computer-controlled systems: theory and design.* Prentice Hall, 1996.

[3] Burak Demirel, Zhenhua Zou, Pablo Soldati, and Mikael Johansson. Modular co-design of controllers and transmission schedules in wirelesshart. In 50^{th} *IEEE Conference on Decision and Control and European Control Conference*, Orlando, FL, USA, Dec. 2011.

[4] M. Drew, Xiangheng Liu, A. Goldsmith, and K. Hedrick. Networked control system design over a wireless LAN. In 44^{th} *IEEE Conference on Decision and Control, and the European Control Conference*, Seveille, Sapin, December 12-15 2005.

[5] G. Franklin, D. Powell, and M. Workman. *Digital control of dynamic systems.* Addision-Wesley, 1990.

[6] HARTCOMM. *WirelessHART Data Sheet.* http://www.hartcomm2.org/hart_protocol wireless_hart/wireless_hart_main.html, 2007.

[7] D. Henriksson and A. Cervin. Optimal on-line sampling period assignment for real-time control tasks based on plant state information. In *IEEE CDC*, 2005.

[8] I-H. Hou, V. S. Borkar, and P. R. Kumar. A theory of QoS in wireless. In *IEEE INFOCOM*, 2009.

[9] I-Hong Hou and P. R. Kumar. Utility-optimal scheduling in time-varying wireless networks with delay constraints. In *Proceedings of the eleventh ACM international symposium on Mobile ad hoc networking and computing*, MobiHoc '10, pages 31–40. ACM, 2010.

[10] I-Hong Hou and P.R. Kumar. Scheduling heterogeneous real-time traffic over fading wireless channels. In *INFOCOM, 2010 Proceedings IEEE*, pages 1–9, March 2010.

[11] ISA. *ISA-100.11a-2009 Wireless systems for industrial automation: Process control and related applications*, 2009 2009.

[12] Torgny Lindvall. *Lectures on the coupling method.* Dover Publications Inc., Mineola, NY, 1992.

[13] C. L. Liu and J. W. Layland. Scheduling algorithms for multiprogramming in a hard-real-time environment. *Journal of the ACM*, 1973.

[14] X. Liu and A. Goldsmith. Wireless network design for distributed control. In *IEEE Conference on Decision and Control*, 2004.

[15] Sirajum Munir, Shan Lin, Enamul Hoque, S. M. Shahriar Nirjon, John A. Stankovic, and Kamin Whitehouse. Addressing burstiness for reliable communication and latency bound generation in wireless sensor networks. In *Proceedings of the 9th ACM/IEEE International Conference on Information Processing in Sensor Networks*, IPSN '10, pages 303–314, 2010.

[16] J. Nilsson. *Real-time control systems with delays.* PhD thesis, Lund Institute of Technology, Lund, Sweden, 1998.

[17] Joonas Pesonen, Haibo Zhang, Pablo Soldati, and Mikael Johansson. Methodology and tools for controller-networking codesign in wirelesshart. In *Proc. 14th IEEE International Conference on Emerging Techonologies and Factory Automation*, Palma di Mallorca, Spain, 2009.

[18] M. Rabi, L. Stabellini, A. Proutiere, and M. Johansson. Networked estimation under contention-based medium access. *International Journal of Robust and Nonlinear Control*, 2010.

[19] H. Rehbinder and M. Sanfridson. Scheduling of a limited communication channel for optimal control. *Automatica*, 40:491–500, 2004.

[20] A. Saifullah, Y. Xu, C. Lu, and Y. Chen. Real-time scheduling for wirelessHART networks. In *In the IEEE RTSS*, 2010.

[21] A. Saifullah, You Xu, Chenyang Lu, and Yixin Chen. Real-time scheduling for WirelessHART networks. In *Real-Time Systems Symposium (RTSS), 2010 IEEE 31st*, pages 150–159, 2010.

[22] Abusayeed Saifullah, Chengjie Wu, Paras Babu Tiwari, You Xu, Yong Fu, Chenyang Lu, and Yixin Chen. Near optimal rate selection for wireless control systems. In *IEEE RTAS*, 2012.

[23] L. Schenato, B. Sinopoli, M. Franceschetti, K. Poolla, and S.S. Sastry. Foundations of control and estimation over lossy networks. *Proceedings of the IEEE*, 95(1):163–187, Jan. 2007.

[24] D. Seto, J. P. Lehoczky, L. Sha, and K. G. Shin. On task scheduling in real-time control systems. In *IEEE RTSS*, 1996.

[25] B. Sinopoli, L. Schenato, M. Franceschetti, K. Poolla, M. I. Jordan, and S. S. Sastry. Kalman filtering with intermittent observations. *IEEE Transactions on Automatic Control*, 49(9):1453–1464, Sep. 2004.

[26] Pablo Soldati, Haibo Zhang, Zhenhua Zou, and Mikael Johansson. Optimal routing and scheduling of deadline-constrained traffic over lossy networks. In *IEEE Globecom*, Miami, Florida, December 2010.

[27] A. Willig. Recent and emerging topics in wireless industrial communications: A selection. *Industrial Informatics, IEEE Transactions on*, 4(2):102–124, May 2008.

[28] A. Willig, K. Matheus, and A. Wolisz. Wireless technology in industrial networks. *Proceedings of the IEEE*, 93(6):1130–1151, June 2005.

[29] T. Winter and P. Thubert. *RPL: IPv6 Routing Protocol for Low power and Lossy Networks*. http://tools.ietf.org/html/draft-ietf-roll-rpl-07.

[30] L. Xiao, M. Johansson, H. Hindi, S. Boyd, and A. Goldsmith. Joint optimization of communication rates and linear systems. *IEEE Transactions on Automatic Control*, 48:148–153, 2003.

[31] Zhenhua Zou, Pablo Soldati, Haibo Zhang, and Mikael Johansson. Delay-constrained maximum-reliability routing over lossy links. In *IEEE Conference on Decision and Control*, Atlanta, GA, December 2010.

[32] Zhenhua Zou, Pablo Soldati, Haibo Zhang, and Mikael Johansson. Energy-efficient deadline-constrained maximum reliability forwarding in lossy networks. Technical report, KTH-Royal Institute of Technology, 2011.